

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number  
WO 03/059010 A1

(51) International Patent Classification<sup>7</sup>: H04R 25/00

(21) International Application Number: PCT/DK03/00003

(22) International Filing Date: 7 January 2003 (07.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PA 2002 00048 12 January 2002 (12.01.2002) DK

(71) Applicant (for all designated States except US): OTICON A/S [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RASMUSSEN, Karsten, Bo [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). FREDERIKSEN, Peter [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900

Hellerup (DK). RASMUSSEN, Frank, Engel [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). PETERSEN, Kim, Spetzler [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).

(81) Designated States (national): AU, BR, CA, CN, IL, JP, RU, US.


(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WIND NOISE INSENSITIVE HEARING AID

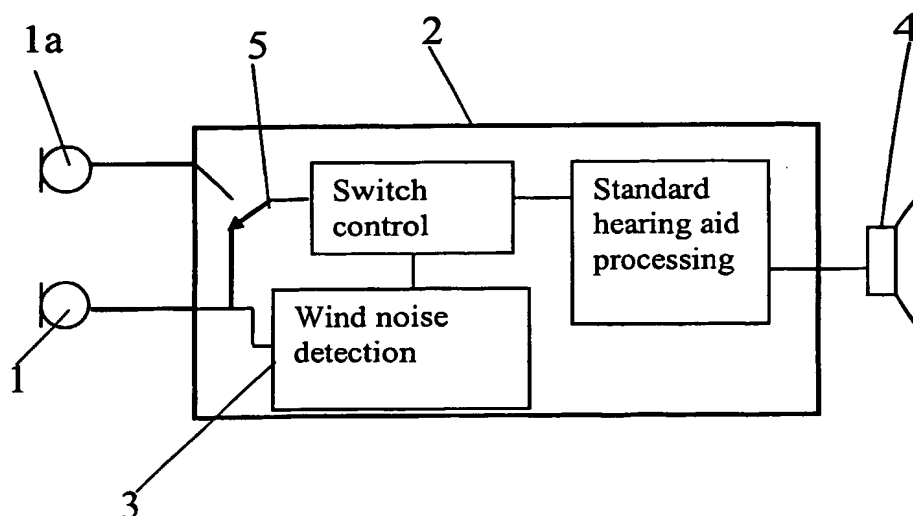

(57) Abstract: The invention concerns a hearing aid with at least one primary sound to electric converting transducer converting sounds in the environment into electrical signals and a signal processing unit for amplifying the electrical signal according to the needs of the user and an electrical to sound transducer for receiving the amplified electrical signal and delivering a sound signal to the ear wherein at least one further sound to electrical transducer is provided. The said further transducer has a sensitivity to wind noise which is smaller than the sensitivity to wind noise of the primary transducer and further the signal processing unit has means for detecting the level of wind noise in the signal from the primary sound to electric converting transducer. According to the invention also selecting means are provided for selecting the signal to be amplified from either the primary- or the at least one further sound to electrical transducer.



WO 03/059010 A1

Wind noise insensitive hearing aid.

#### AREA OF THE INVENTION

5 The invention concerns a hearing aid with at least one primary sound to electric  
converting transducer converting sounds in the environment into electrical signals and a  
signal processing unit for amplifying the electrical signal according to the needs of the  
user and an electrical to sound transducer for receiving the amplified electrical signal and  
delivering a sound signal to the ear wherein at least one further sound to electrical  
10 transducer is provided.

#### BACKGROUND OF THE INVENTION

In hearing aids one of the problems is wind noise picked up by the microphone or  
15 microphones. Wind noise is a result of turbulence, some of which is generated around  
the sound entrance opening of the microphone. It may to some extent be remedied  
through use of sound penetrating blocking, also called wind screens, over and/or in the  
sound entrance opening. However this may cause reduced sensitivity of the microphone.  
Usually hearing aids are produced with an acceptable compromise, which ensures an  
20 acceptable sensitivity loss and also an acceptable performance of the microphone system  
when the user experiences high air velocities around the microphone sound entrance  
opening. The invention seeks to provide a hearing aid, wherein the best possible  
sensitivity of the microphone under different wind conditions is ensured.

#### SUMMARY OF THE INVENTION

25 This is obtained with a hearing aid of the above kind, whereby said further transducer  
has a sensitivity to wind noise which is smaller than the sensitivity to wind noise of the  
primary transducer and whereby the signal processing unit has means for detecting the  
30 level of wind noise in the signal from the primary sound to electric converting  
transducer, and means for selecting the signal to be amplified from either the primary- or  
the at least one further sound to electrical transducer.

Through this it becomes possible to use a wind noise sensitive sound to electric signal transducer when there is no or little wind noise. And whenever wind noise is present to use a less wind noise sensitive transducer, which is not affected by the wind speeds around the hearing aid.

5

In a preferred embodiment the hearing aid has the at least one further transducer provided as a MEMS produced microphone on a chip.

10

In an embodiment of the invention the reduced wind noise sensitivity of the at least one further transducer is provided by the use of a wind filter. Such filters will always cause some reduction of the overall sensitivity, but this only affects the hearing aid whenever the signal from this transducer is used, and it is a small price to pay in order to be able to avoid the highly annoying wind noise.

15

In another embodiment of the invention the reduced wind noise sensitivity of the at least one further transducer is provided by placing the sound inlet opening of said transducer at a wind protected location on the hearing aid. In many cases this is possible, but such a location often is not ideal for receiving the sound from the surroundings and reduced signal to noise ratio will result from this position of the sound inlet opening.

20

In a further aspect, the invention concerns a method for processing the signals from sound to electrical transducers in a hearing aid whereby at least one main transducer is provided and whereby one further transducer is provided to be less sensitive to wind noise than the signal from a primary transducer and whereby the level of wind noise in the signal from the primary transducer is monitored and that the level of wind noise is used to determine whether the signal from the less wind noise sensitive further transducer or the signal from the primary transducer is used in the signal processing device for generating the sound signal at the ear of the user.

25

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic representation of a hearing aid according to the prior art,  
FIG. 2 a schematic representation of a hearing aid according the invention.

## DESCRIPTION OF A PREFERRED EMBODIMENT

In the prior art hearing aid of fig. 1 the microphone 1 receives the sound signal from the surrounding and converts it into an electrical signal. In some cases the microphone 1 is replaced by an array of microphones. The signal from the microphone/microphones undergoes signal processing in signal processor 2 whereby spectral and/or temporal content of the signal is used to identify noise or wind noise. Various schemes of signal processing may be used to overcome the noise. This could be high-pass filtering or shift to omni-mode in directional hearing aids. In fig. 1 a wind noise detector 3 is shown, which receives the signal from the microphone 1. The Wind noise detector 3 may be incorporated in the signal processor 2. A signal processing scheme or filter, which corresponds the best with the detected level of wind noise is chosen, based on the output from the Wind noise detector 3. This prior art technique has the limitation that the wind noise often causes saturation problems in the microphone or microphones and as a result the signal processing designed to eliminate the wind noise is not capable of fully eliminate the wind noise, and when it is attempted to reduce the wind noise this will lead to deterioration of the sound signal.

Fig 2 shows in schematic form an embodiment of the invention, and here a primary microphone 1 is arranged and a further microphone 1a is provided, which is less sensitive to wind noise than the primary microphone. Only one primary microphone 1 is shown in fig. 1 but this could also be an array of microphones. The reduced sensitivity to wind noise of microphone 1a is obtained through the use of a microphone placement at a position, which is well protected from wind noise and/or by the use of a wind filter in, or in front of the microphone sound inlet opening. The additional microphone may suffer from a reduced sensitivity and a reduced frequency bandwidth, but this will be a small sacrifice compared to the improved wind noise protection. The improved wind noise protection will not only serve to reduce the wind- induced noise, but also help avoiding saturation problems in the acoustic signal paths. The detection of the wind noise will take place in a wind noise detection algorithm, which may be based on amplitude and phase information from the channels 1 and 1a and also for multiple channel systems a cross-correlation between channels may be used for identification of wind noise. Based on the level of wind noise, it is decided in the signal processing unit whether the signal from 1a

or 1 is to be used and amplified to generate the output signal to the receiver. If a high wind noise level is detected in the signal from microphone 1a will be chosen and by means of suitable switching means 5 fed to the amplifier in the signal processing unit. The switching means 5 and accompanying switch control means can be realized in a  
5 number of ways well known to the person skilled in the art.

## CLAIMS

5

1. Hearing aid with at least one primary sound to electric converting transducer converting sounds in the environment into electrical signals and a signal processing unit for amplifying the electrical signal according to the needs of the user and an electrical to sound transducer for receiving the amplified electrical signal and delivering a sound signal to the ear wherein at least one further sound to electrical transducer is provided whereby said further transducer has a sensitivity to wind noise which is smaller than the sensitivity to wind noise of the primary transducer and whereby the signal processing unit has means for detecting the level of wind noise in the signal from the primary sound to electric converting transducer, and means for selecting the signal to be amplified from either the primary- or the at least one further sound to electrical transducer.

10

15

2. Hearing aid as claimed in claim 1, wherein the at least one further transducer is provided as a MEMS produced microphone on a chip having electric circuitry thereon.

20

3. Hearing aid as claimed in claim 1 or 2, wherein the reduced wind noise sensitivity of the at least one further transducer is provided by the use of a wind screen.

25

4. Hearing aid as claimed in any of the above claims, wherein the reduced wind noise sensitivity of the at least one further transducer is provided by placing the sound inlet opening of said transducer at a wind protected location on the hearing aid.

30

5. Method for processing the signals from sound to electrical transducers in a hearing aid whereby at least one main transducer is provided and whereby one further transducer is provided to be less sensitive to wind noise than the signal from a primary transducer and whereby the level of wind noise in the signal from the primary transducer is monitored and that the level of wind noise is used to determine

whether the signal from the less wind noise sensitive further transducer or the signal from the primary transducer is used in the signal processing device for generating the sound signal at the ear of the user.

5

10

1/1

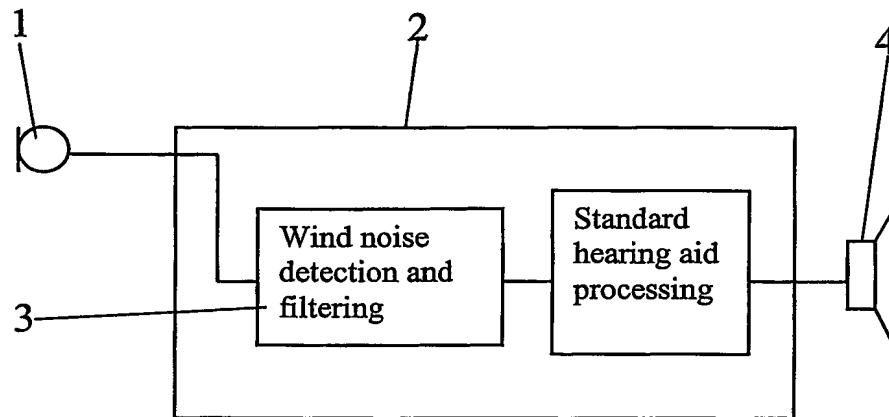


Fig. 1

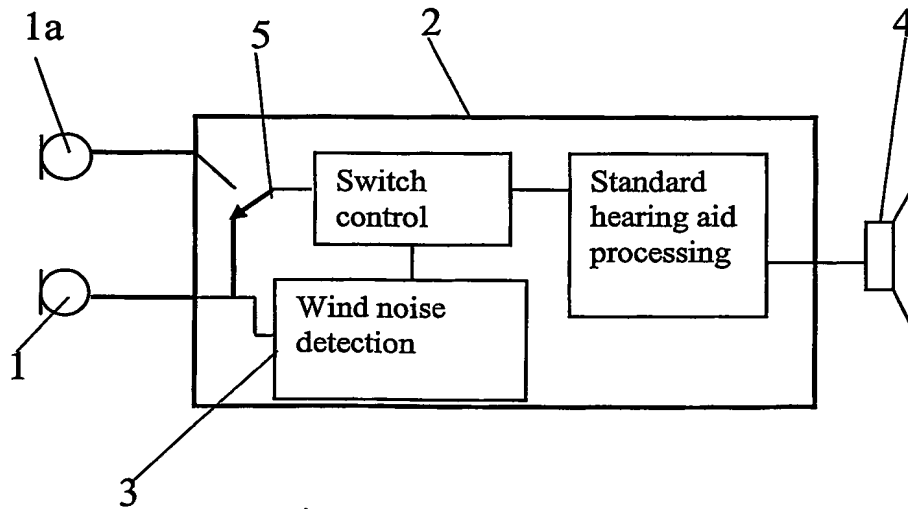


Fig. 2



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00003

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 H04R25/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No. .
P,X	EP 1 196 009 A (TOEPHOLM & WESTERMANN) 10 April 2002 (2002-04-10) the whole document ---	1-5
P,X	US 2002/037088 A1 (DICKEL THOMAS ET AL) 28 March 2002 (2002-03-28) the whole document ---	1-5
A	EP 1 017 253 A (SIEMENS CORP RES INC) 5 July 2000 (2000-07-05) the whole document ---	1-5
A	US 6 327 370 B1 (WITTKOWSKI JOHANNES ET AL) 4 December 2001 (2001-12-04) the whole document ---	1-5
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the International filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the International filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

29 April 2003

Date of mailing of the international search report

14. 05. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

HENRIK ANDERSSON / JA

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/DK 03/00003

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93 20668 A (GN DANAVOX AS ;HANSEN ROY SKOVGAARD (DK)) 14 October 1993 (1993-10-14) the whole document ---	1-5
A	US 4 073 366 A (ESTES ROGER Q) 14 February 1978 (1978-02-14) the whole document -----	1-5

INTERNATIONAL SEARCH REPORT  
Information on patent family members

International Application No  
PCT/UK 03/00003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1196009	A	10-04-2002	AU 9368101 A WO 0230150 A2 EP 1196009 A2 US 2002041696 A1	15-04-2002 11-04-2002 10-04-2002 11-04-2002
US 2002037088	A1	28-03-2002	DE 10045197 C1 DK 200101330 A	07-03-2002 14-03-2002
EP 1017253	A	05-07-2000	CN 1261759 A EP 1017253 A2	02-08-2000 05-07-2000
US 6327370	B1	04-12-2001	US 6101258 A US 5524056 A US 2002057815 A1 AT 221303 T DE 69431037 D1 DE 69431037 T2 EP 0664071 A1 WO 9424834 A1	08-08-2000 04-06-1996 16-05-2002 15-08-2002 29-08-2002 06-03-2003 26-07-1995 27-10-1994
WO 9320668	A	14-10-1993	DK 43292 A AU 3948293 A DE 69327951 D1 DE 69327951 T2 WO 9320668 A1 EP 0634084 A1 JP 7505271 T US 5680467 A	01-10-1993 08-11-1993 06-04-2000 17-08-2000 14-10-1993 18-01-1995 08-06-1995 21-10-1997
US 4073366	A	14-02-1978	NONE	